



DDR SDRAM SO-DIMM MODULE, 2.5V 256MByte - 32MX64 AVK6432U39C5333K3

FEATURES

JEDEC DDR 333MHz PC2700 Version 1.0

- Clock frequency: 166MHz with CAS latency 2.5
- 256 byte serial EEPROM
- Data input and output masking
- Programmable burst length: 2, 4, 8
- Programmable burst type: sequential and interleave
- Programmable CAS latency: 2.5
- Auto refresh and self refresh capability
- Gold card edge fingers
- 8K refresh per 64ms
- Low active and standby current consumption
- SSTL-2 compatible inputs and outputs
- Decoupling capacitors at each memory device
- Double-sided module
- 31.75mm (1.25 inch) height


DESCRIPTION

The AVK6432U39C5333K3 family consists of Unbuffered DDR SDRAM SODIMM memory module. This module is JEDEC-standard 200-pin, small-outline, dual in-line memory module. A 256 byte serial EEPROM on board can be used to store module information such as timing, configuration, density, etc.

The AVK6432U39C5333K3 memory module is 256MByte and organized as a 32MX64 array using (8) 32MX8 SDRAMs in TSSOP II packages.

All memory modules are fabricated using the latest technology design, six-layer printed circuit board substrate construction with low ESR decoupling capacitors on-board for high reliability and low noise.

PHYSICAL DIMENSIONS

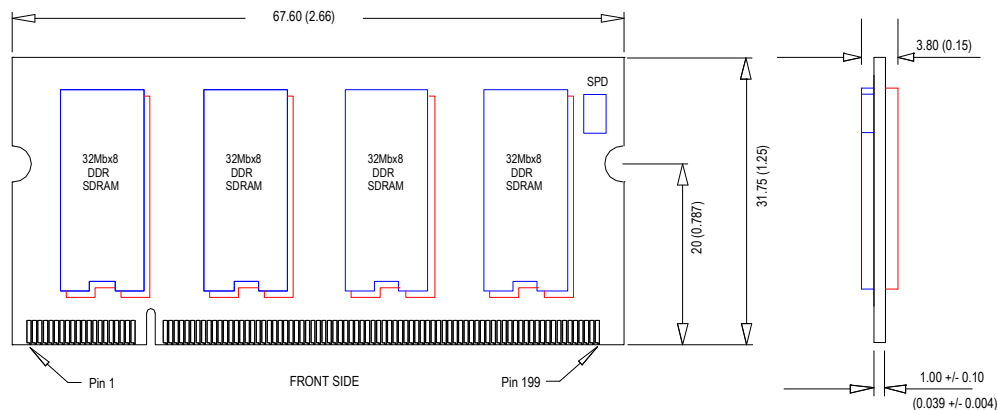

NOTES: 1- All dimensions are in millimeters (inches)
2- All blue ICs are on the front, and all red ICs are on the back side of the module.
3- The dimensional drawings are for reference only. Refer to the JEDEC document for additional information.

Avant Ordering Guides

AV	K	64	32	U	39	C	5	333	K	3
INVENTORY	MOD. TYPE	ORG.	DENSITY	PARITY	TYPE	VOLT.	FEATURE	SPEED	MODE	REV
Av = AVANT	K = 200-PIN SO-DIMM	64=X64	32=32M	U=UNBUFFERED	39=8MX8x4 (8K)	C = 2.5V	5=CAS LATENCY 2.5	333MHZ	K=DDR SDRAM	REV=3

Other options may be available. Call for specific part number information on options not listed.



Avant™ Technology LP., reserves the right to change products or specifications without notice.